

»SISTEMA DE ENTRADA PARA 3000 TELEFONOS MOD.1835

● (SY-00259-00)

1835 PC PROGRAMMABLE TELEPHONE ENTRY SYSTEM

BEST SUITED FOR APPLICATIONS REQUIRING COMPLETE ACCESS CONTROL FOR UP TO 24 ENTRY POINTS, INCLUDING ELEVATOR CONTROL



- Provides both resident and visitor access control into and within apartment buildings, gated communities, condominiums, office buildings, factories and industrial sites
- PC programmable. Programming and Transaction Analysis software included
- Voice and data (programming) connection over either Cellular, VoIP, Wireless, or copper POTS lines
- Built-in electronic directory
- Large easy to use A-Z-CALL buttons
- Resident access control is provided by means of cards, digital PIN codes, or wireless transmitters
- 2 year limited factory warranty



wireless expansion
up to 24 entry points



big characters
half inch LCD display




pc programmable
easy to use software included



voice and remote programming
use almost any phone service and retrofit to older DKS units



»SISTEMA DE ENTRADA PARA 3000 TELEFONOS MOD.1835

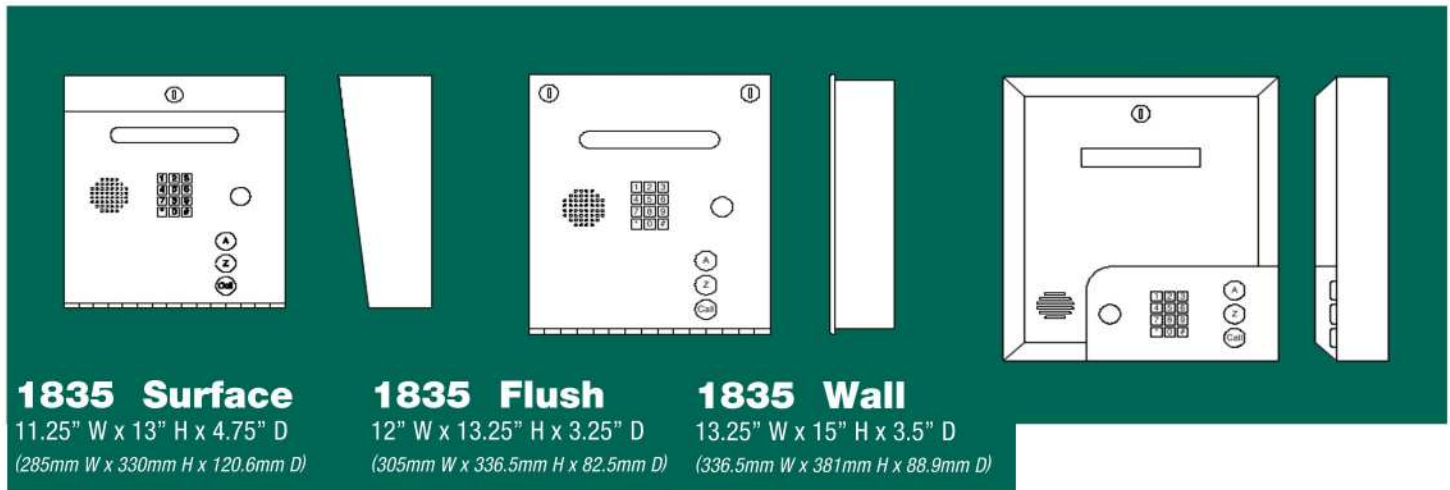

1835	PHONE # MEMORY	ENTRY CODES	DEVICE CODES	DOOR CONTROL	DIRECTORY	ELEVATOR CONTROL	PROGRAMMING	OPTIONS	TRANSACTION BUFFER
Surface Mount	3000	1000 (4-digit)	8000	3 Doors *	Single Line LCD Display	Yes	PC with ** Remote Account Manager Software		8000 Events
Flush Mount	3000	1000 (4-digit)	8000	3 Doors *	Single Line LCD Display	Yes	PC with ** Remote Account Manager Software	Gold Plated Faceplate	8000 Events
Wall Mount	3000	1000 (4-digit)	8000	3 Doors *	Single Line LCD Display	Yes	PC with ** Remote Account Manager Software		8000 Events

* Expands to 24 with Tracker Expansion Boards (wired or wireless)

** Software is included with the DKS system

Technical Features

Mechanical

Stainless steel faceplate
Galvanized steel sub-plate
Metal keypad
Offset speaker holes for protection
Hands free voice operation (Optional handset available on surface or flush mount only)
Built-in postal lock provision, EEPROM memory
Surface, Flush or Wall mounting styles
Flush mount requires flush mounting kit
Enclosures are rated NEMA 4x

Connection Methods

Cellular (powered by AT&T 4G LTE)
VoIP (select your own VoIP provider)
Wireless (Short distances - up to 1000 ft. max)
POTS (Plain Old Telephone Service)

Some of the connection methods noted may incur additional cost for required hardware and/or service subscriptions.

Specifications

Single line 20 character super-twist LCD display
1/2 inch characters
16 VAC (2 power transformers included)
Full Duplex voice communication
Stores up to 3000 phone numbers, 255 area codes
Max 8000 Weigand device (card codes), 10 facility codes
Transaction buffer stores last 8000 events
Control 3 entry points, expandable to 24 with tracker expansion boards
Programmable directory codes (1 to 4 digits)
10 & 11 digit dialing capability
31 security (permission) levels, 29 programmable with 4 time zones each
32 holiday schedules
Four-digit entry codes
Built-in clock / calendar
Hold open time zones (8)
Entry code time zones
True Anti-Pass Back
Live Transactions feature (requires TCP/IP internet connection or RS-232 connection)

Miscellaneous

Environmental: 10°F to 145°F (-12°C to 62°C)
Heater kit (P/N 2600-584) recommended when temperatures routinely fall below 10°F (-12°C)
ADA Compliant handset kit (P/N 1807-012) available on surface or flush mount only
Camera Ready: Optional B&W or Color CCTV camera*
*may require additional CCTV equipment
Shipping weight approximately 20-25 Lbs (9-11 kg)



FCC (US) DUF6VT-12874-0T-T
DOC (CAN) 1736 4528 A



V01.17