

»SISTEMA DE ENTRADA PARA 3000 TELEFONOS MOD.835
● (SY-00259-00)

**1835 PC PROGRAMMABLE
TELEPHONE
ENTRY SYSTEM**

BEST SUITED FOR APPLICATIONS REQUIRING COMPLETE ACCESS CONTROL FOR UP TO 24 ENTRY POINTS, INCLUDING ELEVATOR CONTROL



- Provides both resident and visitor access control into and within apartment buildings, gated communities, condominiums, office buildings, factories and industrial sites
- PC programmable. Programming and Transaction Analysis software included
- Voice and data (programming) connection over either Cellular, VoIP, Wireless, or copper POTS lines
- Built-in electronic directory
- Large easy to use A-Z-CALL buttons
- Resident access control is provided by means of cards, digital PIN codes, or wireless transmitters
- 2 year limited factory warranty



wireless expansion
up to 24 entry points



big characters
half inch LCD display




pc programmable
easy to use software included



voice and remote programming
use almost any phone service and retrofit to older DKS units



»SISTEMA DE ENTRADA PARA 3000 TELEFONOS MOD.835

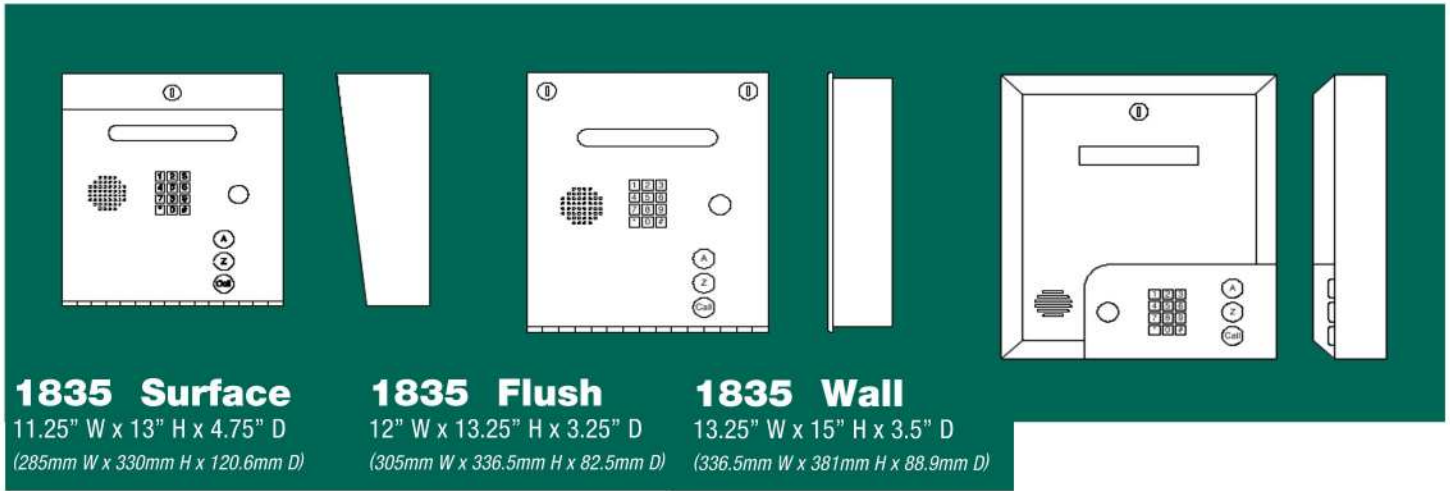

1835 Surface

11.25" W x 13" H x 4.75" D
 (285mm W x 330mm H x 120.6mm D)

1835 Flush

12" W x 13.25" H x 3.25" D
 (305mm W x 336.5mm H x 82.5mm D)

1835 Wall

13.25" W x 15" H x 3.5" D
 (336.5mm W x 381mm H x 88.9mm D)

1835	PHONE # MEMORY	ENTRY CODES	DEVICE CODES	DOOR CONTROL	DIRECTORY	ELEVATOR CONTROL	PROGRAMMING	OPTIONS	TRANSACTION BUFFER
Surface Mount	3000	1000 (4-digit)	8000	3 Doors *	Single Line LCD Display	Yes	PC with ** Remote Account Manager Software		8000 Events
Flush Mount	3000	1000 (4-digit)	8000	3 Doors *	Single Line LCD Display	Yes	PC with ** Remote Account Manager Software	Gold Plated Faceplate	8000 Events
Wall Mount	3000	1000 (4-digit)	8000	3 Doors *	Single Line LCD Display	Yes	PC with ** Remote Account Manager Software		8000 Events

* Expands to 24 with Tracker Expansion Boards (wired or wireless)

** Software is included with the DKS system

Technical Features

Mechanical

Stainless steel faceplate
 Galvanized steel sub-plate
 Metal keypad
 Offset speaker holes for protection
 Hands free voice operation (Optional handset available on surface or flush mount only)
 Built-in postal lock provision, EEPROM memory
 Surface, Flush or Wall mounting styles
 Flush mount requires flush mounting kit
 Enclosures are rated NEMA 4x

Connection Methods

Cellular (powered by AT&T 4G LTE)
 VoIP (select your own VoIP provider)
 Wireless (Short distances - up to 1000 ft. max)
 POTS (Plain Old Telephone Service)

Some of the connection methods noted may incur additional cost for required hardware and/or service subscriptions.

Specifications

Single line 20 character super-twist LCD display 1/2 inch characters
 16 VAC (2 power transformers included)
 Full Duplex voice communication
 Stores up to 3000 phone numbers, 255 area codes
 Max 8000 Weigand device (card codes), 10 facility codes
 Transaction buffer stores last 8000 events
 Control 3 entry points, expandable to 24 with tracker expansion boards
 Programmable directory codes (1 to 4 digits)
 10 & 11 digit dialing capability
 31 security (permission) levels, 29 programmable with 4 time zones each
 32 holiday schedules
 Four-digit entry codes
 Built-in clock / calendar
 Hold open time zones (8)
 Entry code time zones
 True Anti-Pass Back
 Live Transactions feature (requires TCP/IP internet connection or RS-232 connection)

Miscellaneous

Environmental: 10°F to 145°F (-12°C to 62°C)
 Heater kit (P/N 2600-584) recommended when temperatures routinely fall below 10°F (-12°C)
 ADA Compliant handset kit (P/N 1807-012) available on surface or flush mount only
 Camera Ready: Optional B&W or Color CCTV camera*
 *may require additional CCTV equipment
 Shipping weight approximately 20-25 Lbs (9-11 kg)



FCC (US) DUF6VT-12874-0T-T
 DOC (CAN) 1736 4528 A



V01.17