

»ZONA DE TRABAJO EXPLOSIVA CON GASES Y POLVO, MAPA DE IDENTIFICACIÓN MOD.ATEX 2.2G MARCA FERROFLEX, GFA ELEKTROMATEN.

ATEX 2.2G

Fenroll and Alumroll high speed doors can be manufactured in environments for 2.2.g, ATEX environments.

Product category and / or work site must be identified.

Environnement

1
2
21
22

Category


2G (gas)
3G (gas)
2D (dust)
3D (dust)

Environnements are defined with 1 or 2 digits, gas or dust and its category.

ZONAS DE TRABAJO / WORK SITES / LIEUX DE TRAVAIL.

Zonas de Trabajo

According with those directives, we are able to manufacture 2 2G (gas)

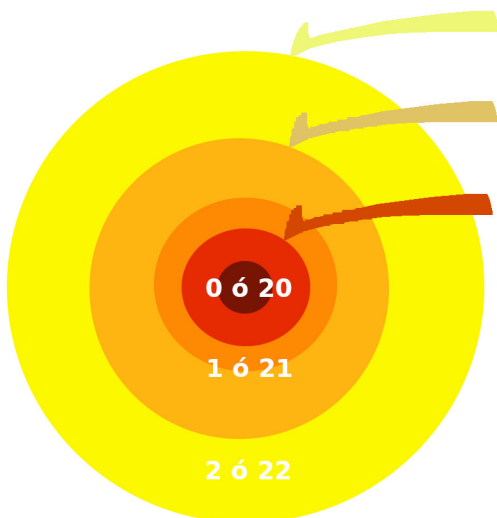

- Folding Up door can not be manufactured for ATTEX.
- We can not manufacture for other environnements.
- Control panel must be located outside ATTEX zone.
- No safety esge, so door must be operated with dead man fuction.
- According with current standars, doors does not have a certificate. If requested we give homologations for mechanical and electrical devices for ATTEX zone.
- Only available with GFA ELEKTROMATEN motor and control panel, manufactures for ATTEX zones.
- Motor dimensions at the door are slightly diferent from those indicated due to the fact that the motor is larger than the standar model.
- ATTEX 2.2 G doors need a special PVC curtain with antistatic protection.
- AVAILIABLE COLOURS: **RAL 3020-RED**, **RAL 3056-ORANGE**, **RAL 1018-YELLOW**, **RAL 7166-GREY** & **RAL 5031-BLUE**.



(229) 461-7028

portonesautomaticos@adsver.com.mx
portonesautomaticos@prodigy.net.mx



V03.21