



Puertas & Portones Automáticos, S.A. de C.V.
¡Nuestra pasión es la Solución!...

» PUERTA RAPIDA ENROLLABLE MARCA HORMANN FLEXON TNR MOD.SM1600L.



Speed-Master® 1600 L¹⁹ High Performance Door

NEMA 4X Smart Start™ NXT control box, built-in light curtain
High cycle interior or exterior door openings up to 14'0" w x 16'0" h



portonesautomaticos@adsver.com.mx
portonesautomaticos@prodigy.net.mx



V04.21

(229) 461-7028

(229) 927-5107, 167-8080, 167-8007, 151-7529.



www.adsver.com.mx



Puertas & Portones Automáticos, S.A. de C.V.
¡Nuestra pasión es la Solución!...

» PUERTA RAPIDA ENROLLABLE MARCA HORMANN FLEXON TNR

MOD.SM1600L.

Speed-Master® 1600 L¹⁹

High cycle applications up to 14'0" w x 16'0" h


Features

Application	Interior or exterior
Model / Classification	1600 L ¹⁹ / Fabric
Size range	Maximum 14'0" w X 16'0" h
Technology	Direct-drive, sectional panel
Operating speed	Opening 60" IPS Closing 30" IPS
Panel	Patented, sectional design, heavy-duty aluminum hinge profiles Panel: reinforced, puncture resistant 1/8" thick 90 oz. / sq. yd. Bulldog XT material Colors: orange, blue, black, gray
Vision	Two full-width, clear PVC starting approximately 36" off floor
Custom panel imprints	Logos, photos or text Digitally printed onto panel UV treated and waterproof Maximum image size 7'0" wide X 3'0" high
Resistance to wind load	Consult factory
Guide tracks	12 ga. galvanized steel 7-3/8" wide X 4-3/8" projection Optional: Windlocks
Hoods	Optional: Galvanized steel
Safety	8'0" high light curtain built into guide tracks
Control	NEMA 4X Smart Start™ NXT 208 to 575 v / 3-phase / 60 Hz voltage input Optional: HFCB NEMA 3 Smart Start NXT 230 v / 1-phase 60 Hz voltage input Optional: UPS emergency battery pack (Requires use of HFCB 1-phase control box)
Activation options	Push button / Pull cord / Motion detector / Presence detector Induction loop detector (wire/sealant by others) / Remote control Touchless switch (several models) Consult factory for additional options
Accessories	LED Lite-Advance / SmartControl M2M / ScanProtect Wireless Crash Alert / Remote Keypad / Energy Analysis Report
Emergency	Chain hoist
Compliance	Door complies with requirements of UL325
Warranty	5 & 2 Year: Motor/gearbox (excluding catch) and panel material 5 years, materials & workmanship All other mechanical and electrical components free from defects, 2 years



For demanding high cycle locations

Design advantages such as zero moving parts within the guide tracks and direct-drive motor, support walk-away dependability. For exterior mounting doors, options like a roll and motor cover along with motor / gearbox heater make it possible to accommodate high traffic exterior door applications during cold weather.

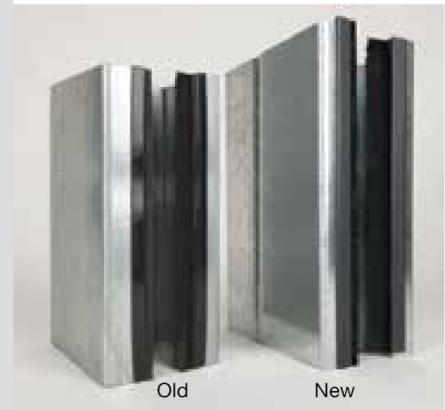

New in 2019 – Two piece guide tracks

Heavy-duty two-piece guide tracks with brush seal fit into any application. Overall dimensions: 7-3/8" wide X 4-3/8" projection.



V04.21

(229) 461-7028

portonesautomaticos@adsver.com.mx
portonesautomaticos@prodigy.net.mx



(229) 927-5107, 167-8080, 167-8007, 151-7529.

www.adsver.com.mx